
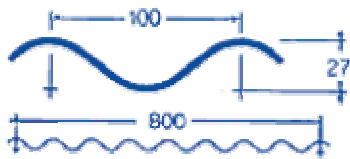
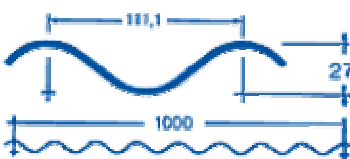
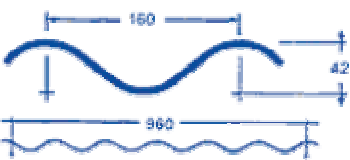





## Wellprofile

Profil	Baubreite (mm)	Blechdicke (mm)	Blecheigen- gewicht (kg/m <sup>2</sup> )	Widerstands- moment (W x cm <sup>2</sup> )
18/76 Lieferbar in 3 verschiedenen Baubreiten 	836	0,70	6,58	-
	988	0,75	7,18	3,57
	1064	1,00	9,57	4,71
27/100 	800	0,75	7,50	5,53
27/111 	1000	0,70	7,00	-
		0,75	7,50	-
		1,00	10,00	-
42/160 	960	0,70	7,29	-
		0,75	7,81	-
		1,00	10,40	-
18/76 Alu 	836	0,70	2,26	-
	988	0,80	2,58	3,57
	1064	1,00	3,23	4,71
27/111 Alu 	1000	0,70	2,41	-
		0,80	2,57	-
		1,00	3,44	-
42/160 Alu 	960	0,70	2,51	-
		0,80	2,86	-
		1,00	3,58	-